




Banner Stand Assembly

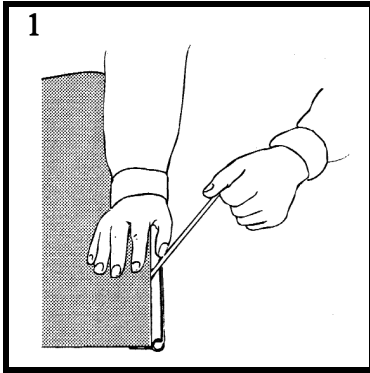


Always make sure the surface is clean.
Place the image (picture side up) to the top profile.
Remove the protective strip and then press firmly!

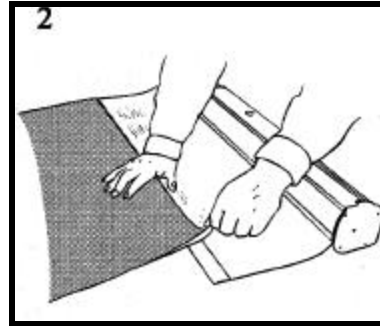


After removing the protective strip, apply the image with the picture side facing up.
Be sure to follow the tape line.

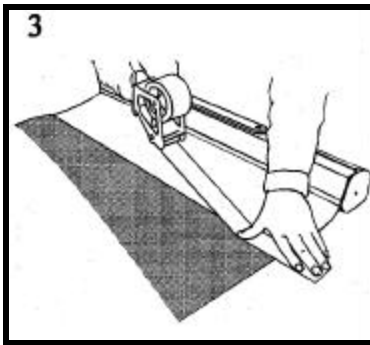

IMPORTANT!
To secure the image apply packaging tape over the joint on both sides of the assembly.

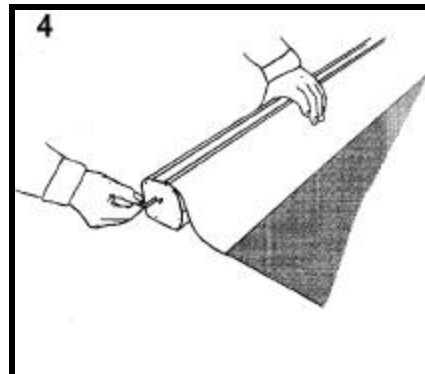

Grip the image and display with your left hand.
Remove the locking pin with your right hand.
THE SPRING IS NOW ACTIVATED!

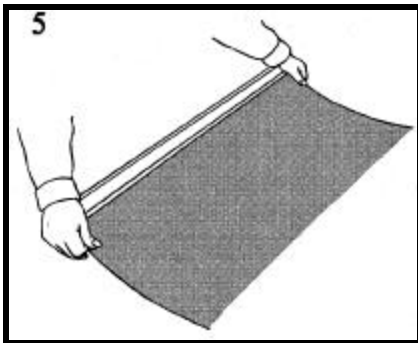

Now carefully let the image roll into the unit.

Changing the image

- A. Locate the locking pin.
- B. Pull out the image as far as possible.
- C. Adjust length, so that the locking pin fits into the hole on the side of the banner stand.
- D. Important—Lock the mechanism with the locking pin.
- E. Remove old image.