


118" x 96" FREESTANDING IGNITER LIGHTBOX
IG118X96-TV



PLEASE REFER TO LAST PAGE OF
MANUAL FOR SEG INSTRUCTIONS

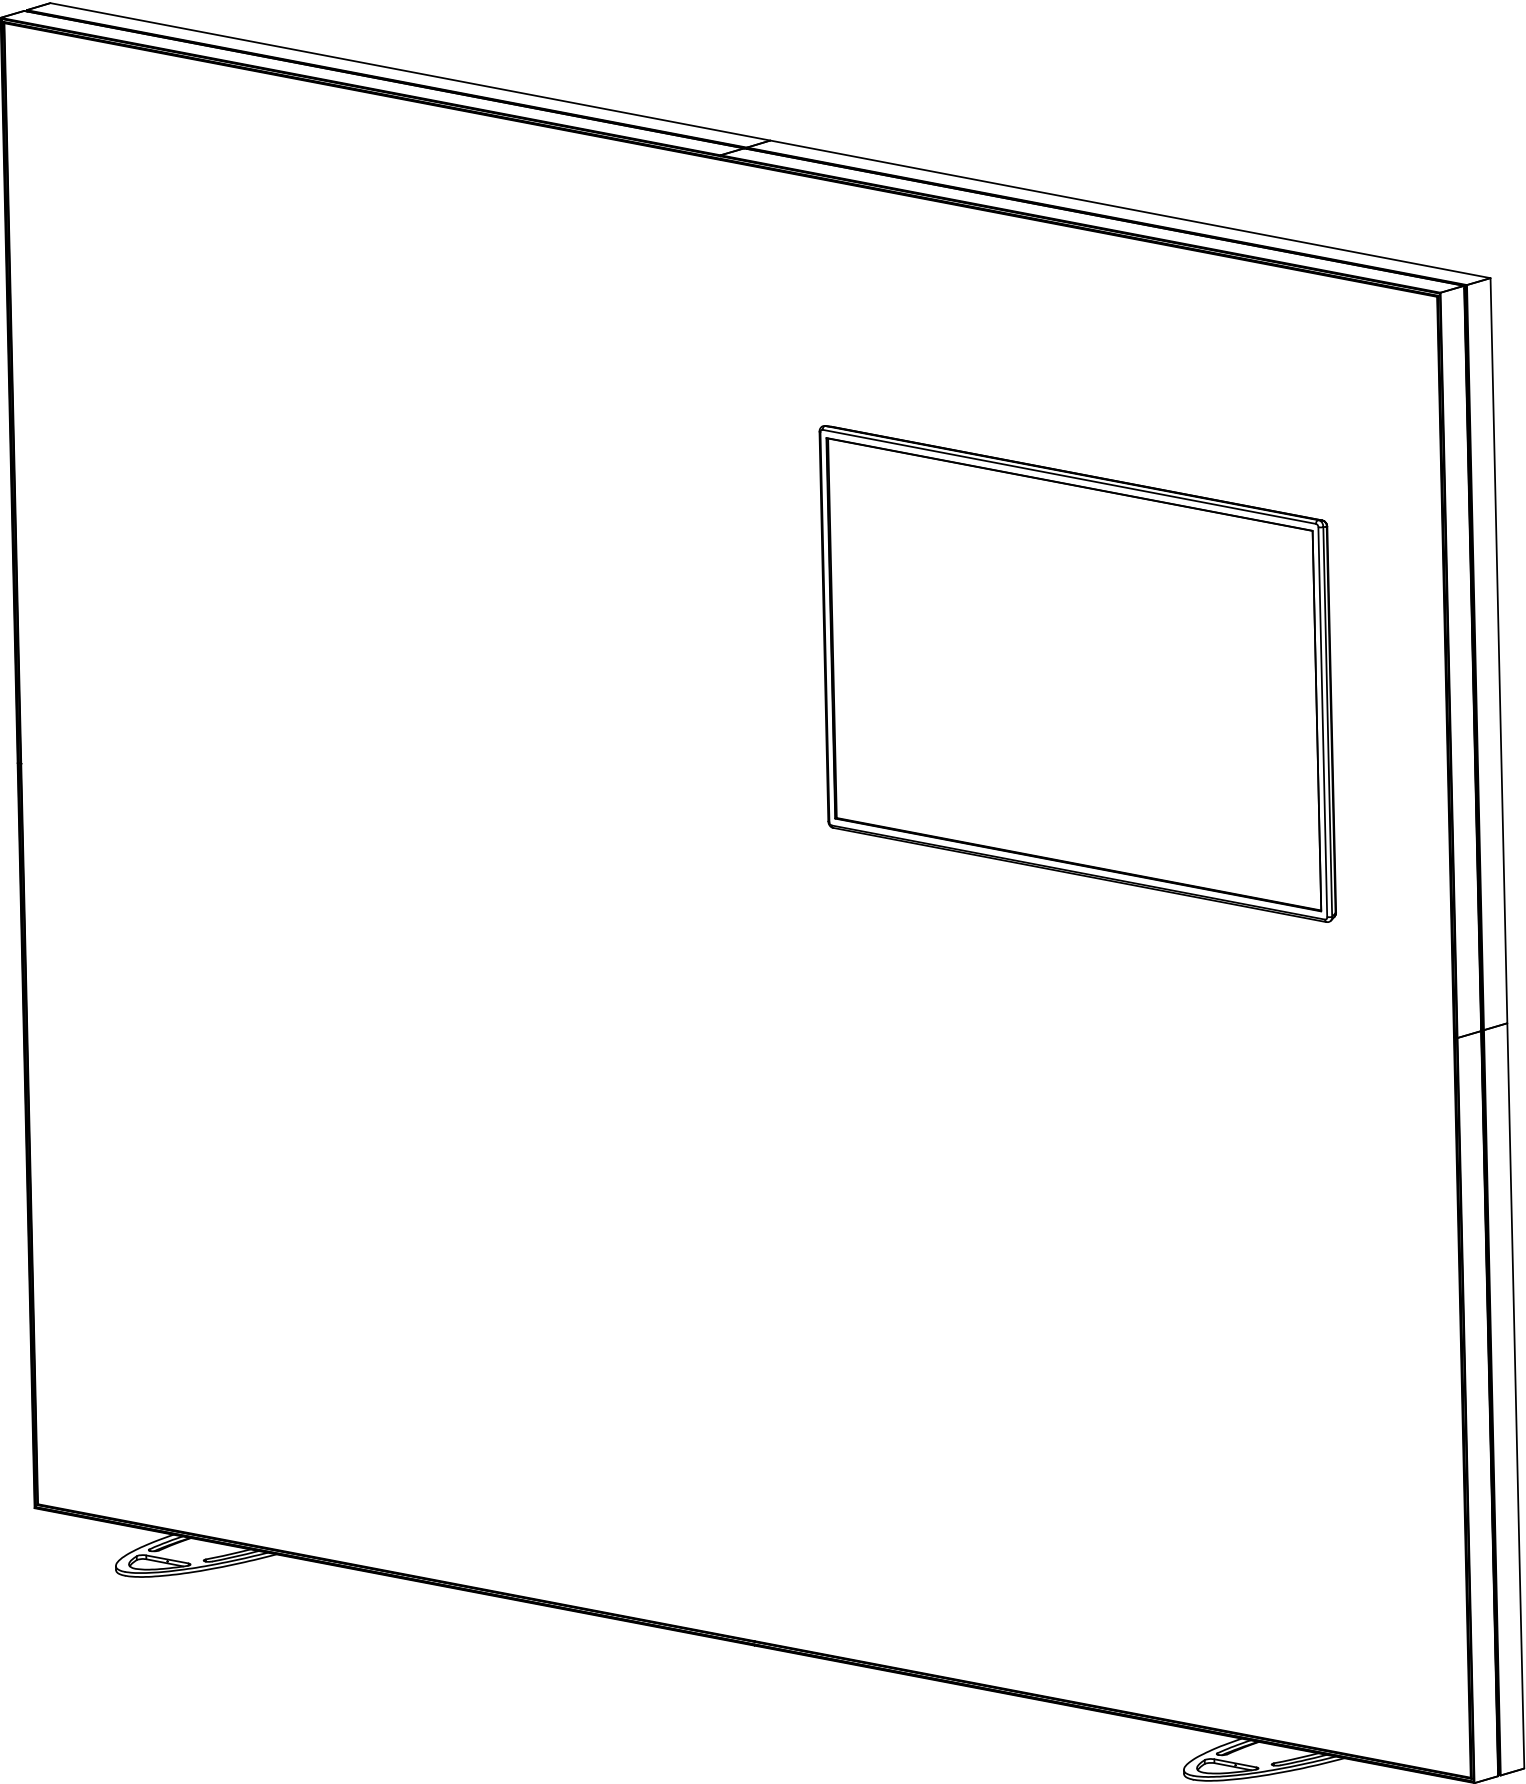

FRONT VIEW WITH
GRAPHIC & RIGHT SIDE MONITOR


SET-UP MANUAL




| | | | | | |
|---------------------------------------|--|---|--|---|--|
| FINISH: | | THIRD ANGLE PROJECTION | | PROPERTY: THIS DOCUMENT AND DATA DISCLOSED HEREIN OR HEREWITH IS NOT TO BE REPRODUCED, USED, OR DISCLOSED IN WHOLE OR IN PART TO ANYONE WITHOUT PERMISSION OF NIEDO GROUP, INC. | |
| MATERIAL: | |  | | | |
| DIMENSIONS ARE IN MILLIMETERS | |  | | NIEDO GROUP, INC. 5465 SW WESTERN AVE. BEAVERTON, OR 97005 | |
| TOLERANCES UNLESS OTHERWISE SPECIFIED | | 118" x 96" FREE STANDING IGNITER LIGHTBOX WITH RH MONITOR SETUP INSTRUCTION | | | |
| | | SIZE: B DWG. NO. | | REV: -01 | |
| SCALE: NA | | DO NOT SCALE DRAWING | | SHEET 1 | |

118" x 96" FREESTANDING IGNITER LIGHTBOX
IG118X96-TV


GENERAL NOTES & DETAIL

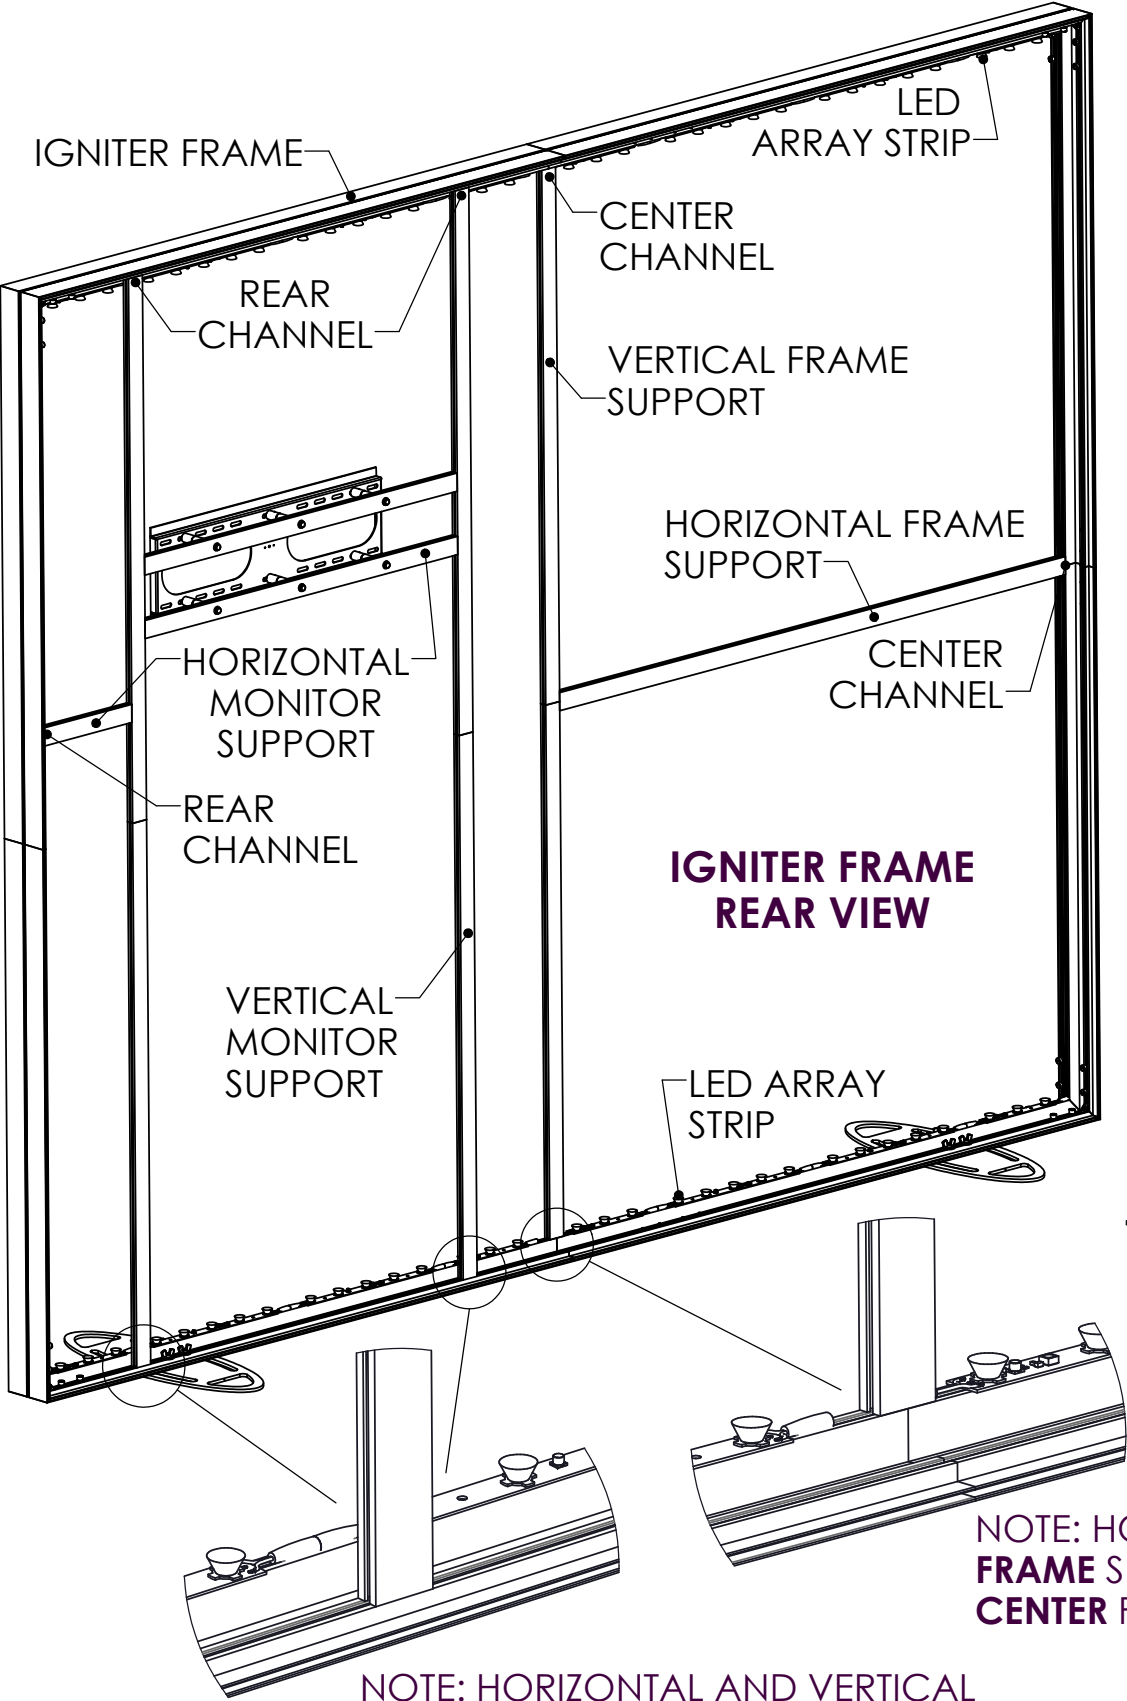


IGNITER FRAME
REAR VIEW

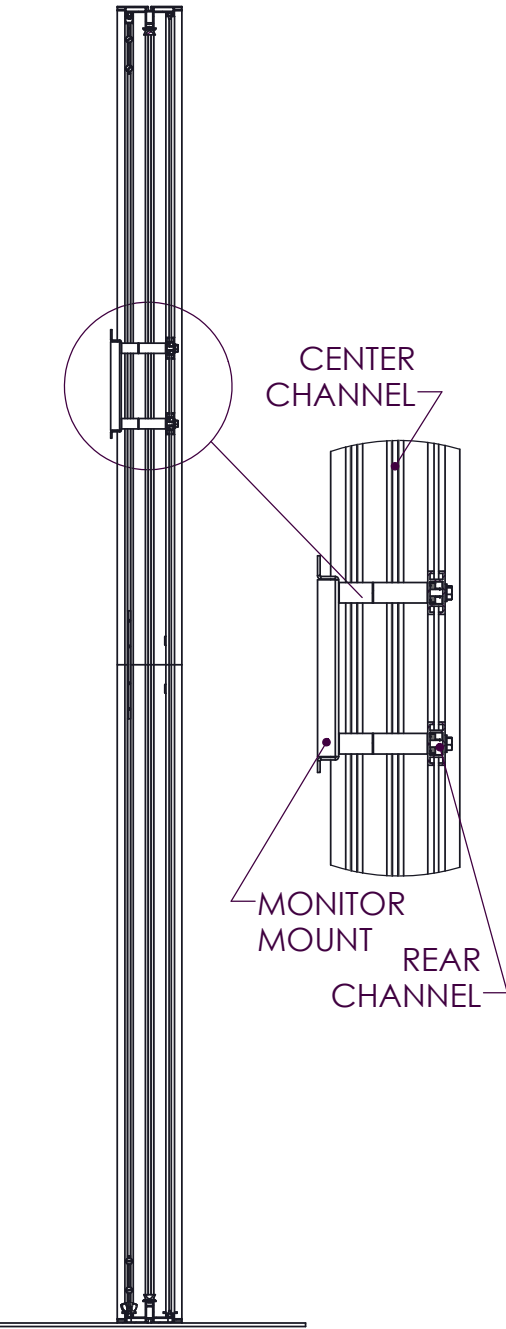

NOTE: HORIZONTAL AND VERTICAL
FRAME SUPPORTS MOUNT IN
CENTER FRAME CHANNEL

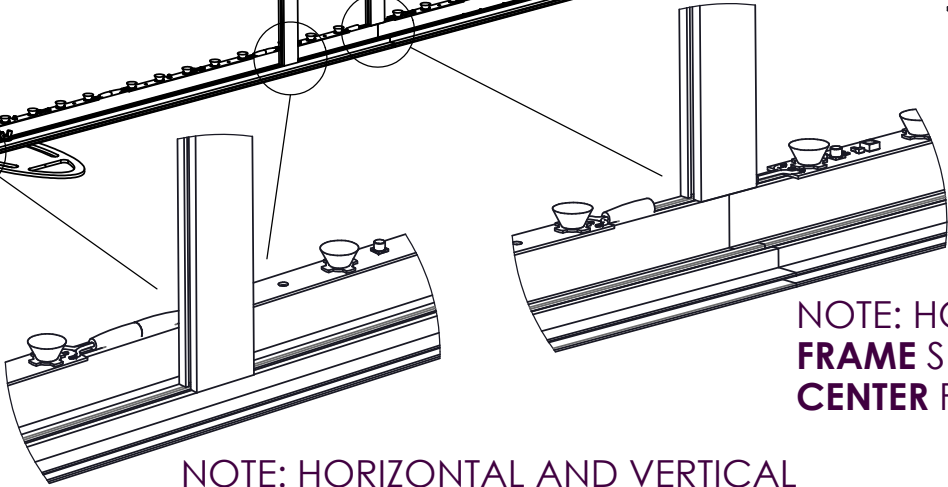

NOTE: HORIZONTAL AND VERTICAL
MONITOR SUPPORTS MOUNT IN
REAR FRAME CHANNEL

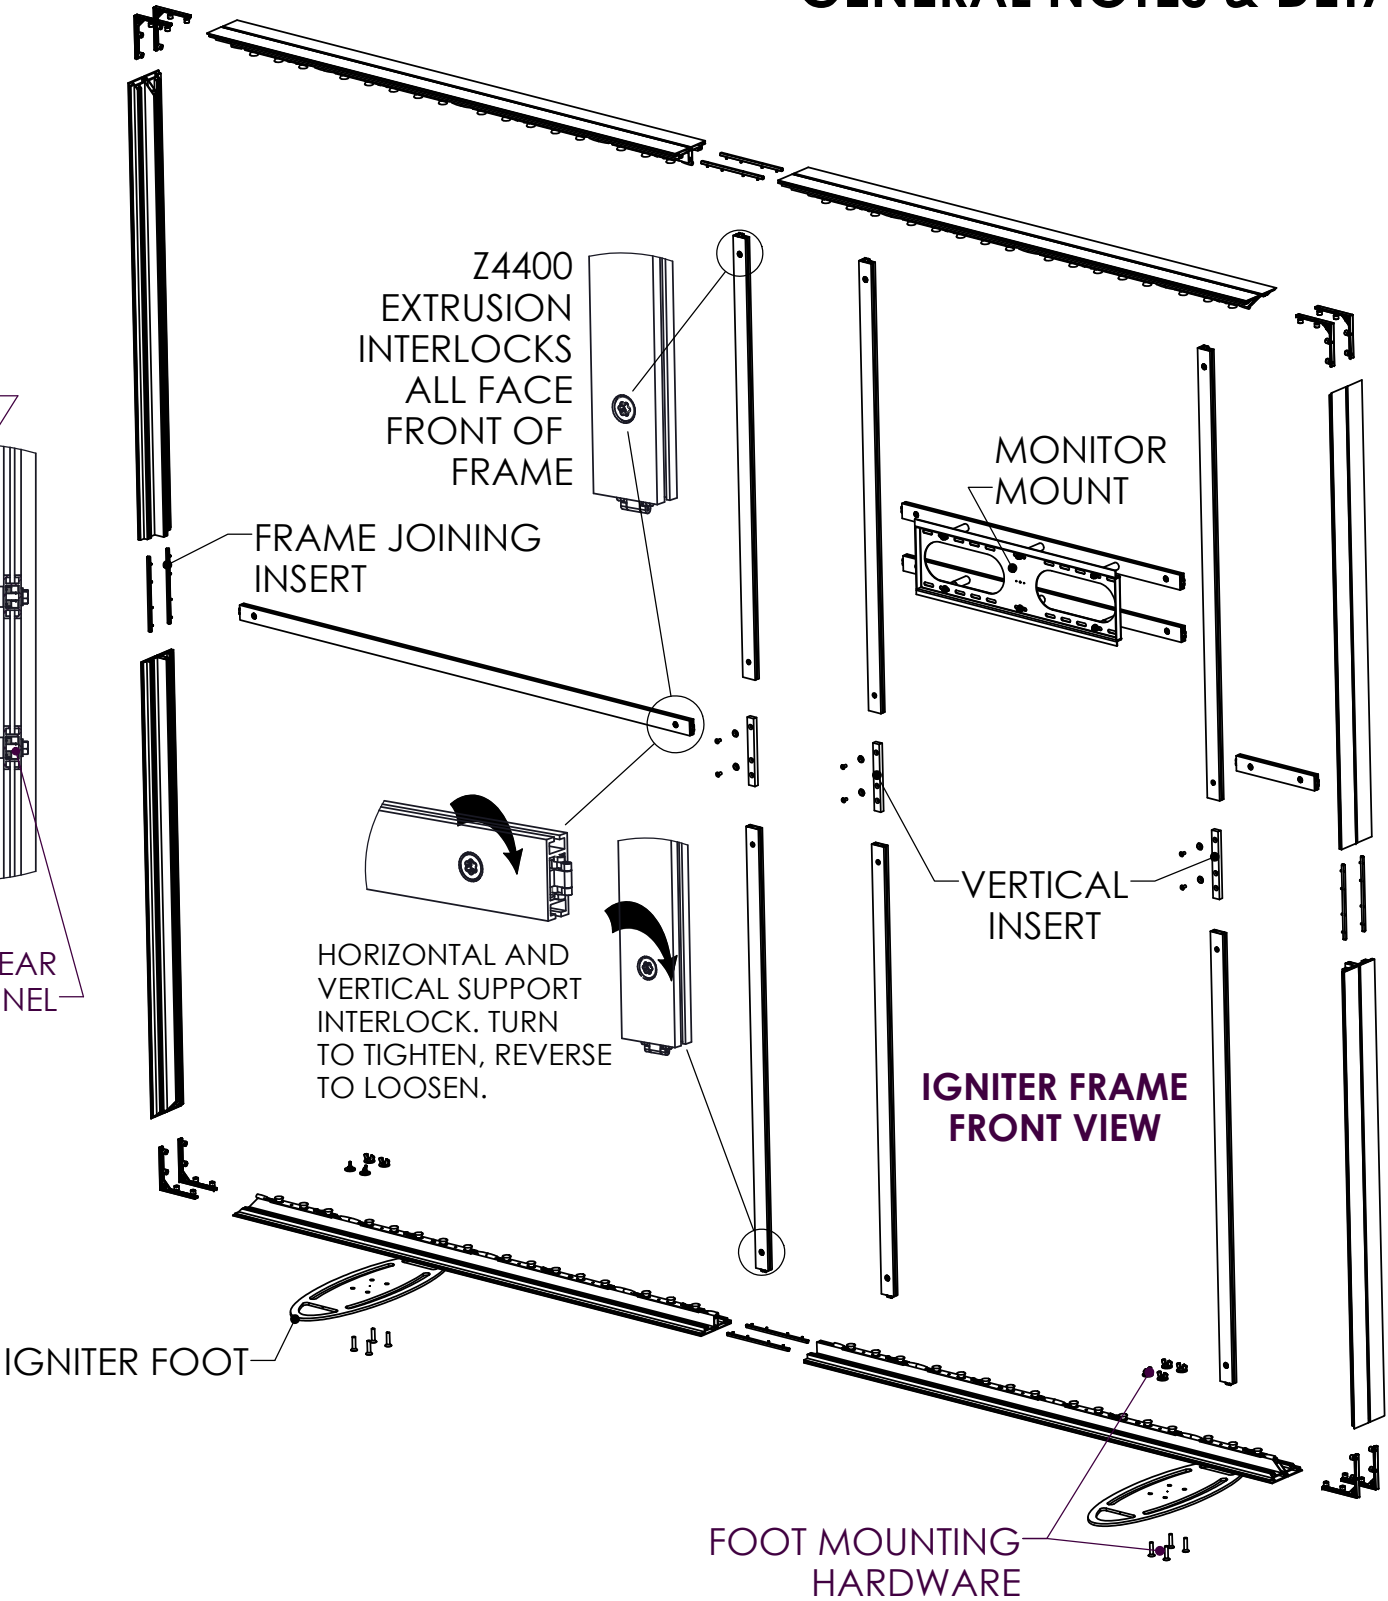

IGNITER FRAME
FRONT VIEW

| | | |
|---------------------------------------|---|---|
| FINISH: | THIRD ANGLE PROJECTION | THIS DOCUMENT AND DATA DISCLOSED HEREIN OR HEREWITH IS NOT TO BE REPRODUCED, USED, OR DISCLOSED IN WHOLE OR IN PART TO ANYONE WITHOUT PERMISSION OF NIEDO GROUP, INC. |
| MATERIAL: | | 5465 SW WESTERN AVE. BEAVERTON, OR 97005 |
| DIMENSIONS ARE IN MILLIMETERS | 118" x 96" FREE STANDING IGNITER LIGHTBOX WITH RH MONITOR SETUP INSTRUCTION | |
| TOLERANCES UNLESS OTHERWISE SPECIFIED | SCALE: NA | DO NOT SCALE DRAWING |
| | SHEET 1 | REV -01 |

118" x 96" FREESTANDING IGNITER LIGHTBOX
IG118X96-TVR

FRAME ASSEMBLY DETAILS

1. WITH FRAME FLAT ON THE FLOOR ASSEMBLE FRAME SIDES WITH JOINT INSERTS IN OUTSIDE CHANNELS OF FRAME AS SHOWN. TIGHTEN SETSCREWS.

2. ASSEMBLE CORNERS USING CORNER BRACKETS INSERTED INTO OUTSIDE CHANNELS OF FRAME AS SHOWN. FINGER TIGHTEN THUMB SCREWS ONLY.

3. ASSEMBLE FEET TO FRAME WITH SCREWS AND HARDWARE PROVIDED. FINGER TIGHTEN WING NUTS. STAND FRAME UP FOR MONITOR MOUNT ATTACHMENT.

| | | |
|---------------------------------------|---|---|
| FINISH: | THIRD ANGLE PROJECTION | PROPRIETARY |
| MATERIAL: | | THIS DOCUMENT AND DATA DISCLOSED HEREIN OR HEREWITH IS NOT TO BE REPRODUCED, USED, OR DISCLOSED IN WHOLE OR IN PART TO ANYONE WITHOUT PERMISSION OF NIEDO GROUP, INC. |
| DIMENSIONS ARE IN MILLIMETERS | NIEDO GROUP, INC. 5465 SW WESTERN AVE. BEAVERTON, OR 97005 | |
| TOLERANCES UNLESS OTHERWISE SPECIFIED | 118" x 96" FREE STANDING IGNITER LIGHTBOX WITH RH MONITOR SETUP INSTRUCTION | |
| SIZE B | DWG. NO. | REV. -01 |
| SCALE: NA | DO NOT SCALE DRAWING | SHEET 1 |

118" x 96" FREESTANDING IGNITER LIGHTBOX IG118X96-TV

FRAME SUPPORT ASSEMBLY DETAIL

4. ASSEMBLE LONG VERTICAL FRAME SUPPORTS BY COUPLING THE 2 SECTIONS USING THE VERTICAL INSERT AND INCLUDED HARDWARE.

5. ASSEMBLE THE COMPLETED FRAME VERTICAL SUPPORTS TO THE FRAME BY INSERTING THE TOP AND BOTTOM INTERLOCK MECHANISMS INTO THE TOP AND BOTTOM FRAME CENTER CHANNELS.


6. ASSEMBLE THE HORIZONTAL SUPPORT TO THE FRAME BY INSERTING THE INTERLOCK MECHANISMS INTO THE SIDE FRAME CENTER CHANNELS AND SIDE CHANNEL OF THE VERTICAL SUPPORT.

TIGHTEN ALL INTERLOCKS OF BOTH HORIZONTAL AND VERTICAL FRAME SUPPORTS AS IN DETAIL A.

NOTE: INTERLOCK MECHANISMS ON Z4400 EXTRUSION SUPPORTS FACE FRONT FOR CONVENIENT ADJUSTMENT. SEE PAGE 2 FRONT VIEW DETAIL.

FRONT

DETAIL A

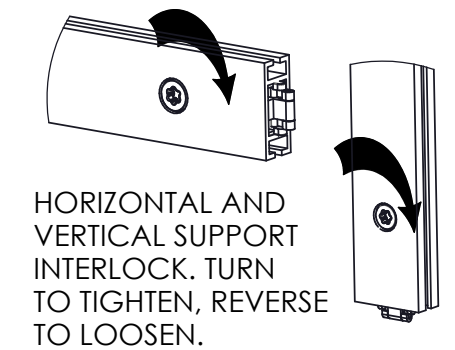

IGNITER FRAME REAR VIEW

STEP 5

STEP 4

STEP 6

STEP 6

STEP 5


118" x 96" FREESTANDING IGNITER LIGHTBOX
IG118X96-TVR

MONITOR MOUNT ATTACHMENT DETAIL


NOTE: INTERLOCK MECHANISMS
ON Z4400 EXTRUSION SUPPORTS FACE
FRONT FOR CONVENIENT ADJUSTMENT.
SEE PAGE 2 FRONT VIEW DETAIL.

7. ASSEMBLE LONG VERTICAL
MONITOR SUPPORTS BY COUPLING
THE 2 SECTIONS USING THE VERTICAL
INSERT AND INCLUDED HARDWARE.

8. ASSEMBLE THE COMPLETED
MONITOR VERTICAL SUPPORTS
TO THE FRAME BY INSERTING
THE TOP AND BOTTOM INTERLOCK
MECHANISMS INTO THE TOP AND
BOTTOM FRAME REAR CHANNELS.

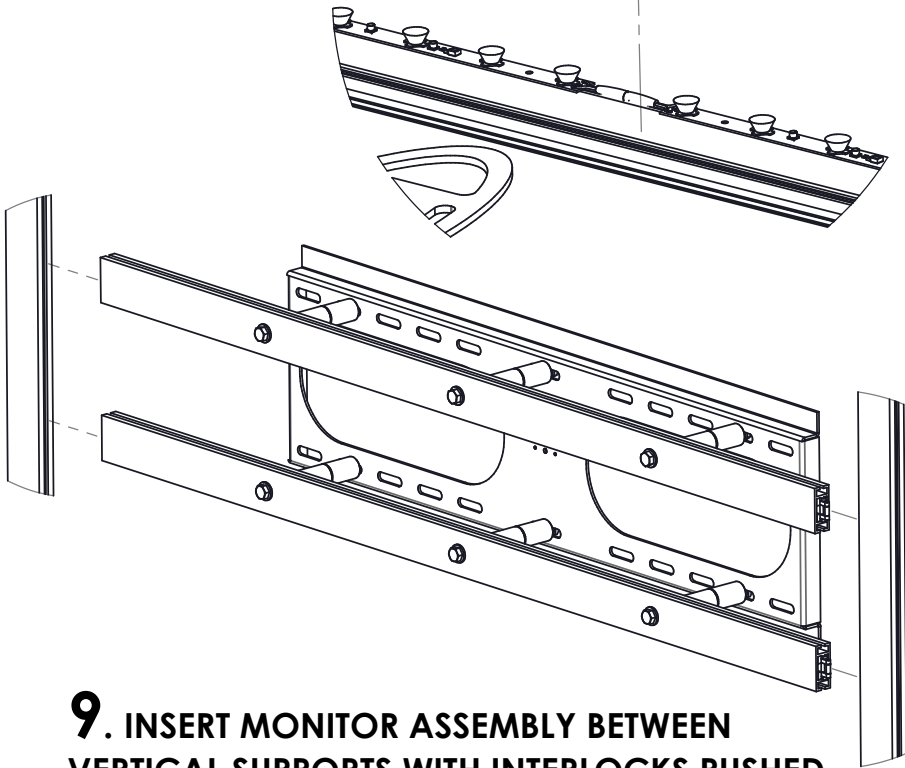


9. INSERT MONITOR ASSEMBLY BETWEEN
VERTICAL SUPPORTS WITH INTERLOCKS PUSHED
INTO THE VERTICAL SUPPORT SIDE CHANNELS.
TIGHTEN INTERLOCK MECHANISMS AS IN DETAIL A.

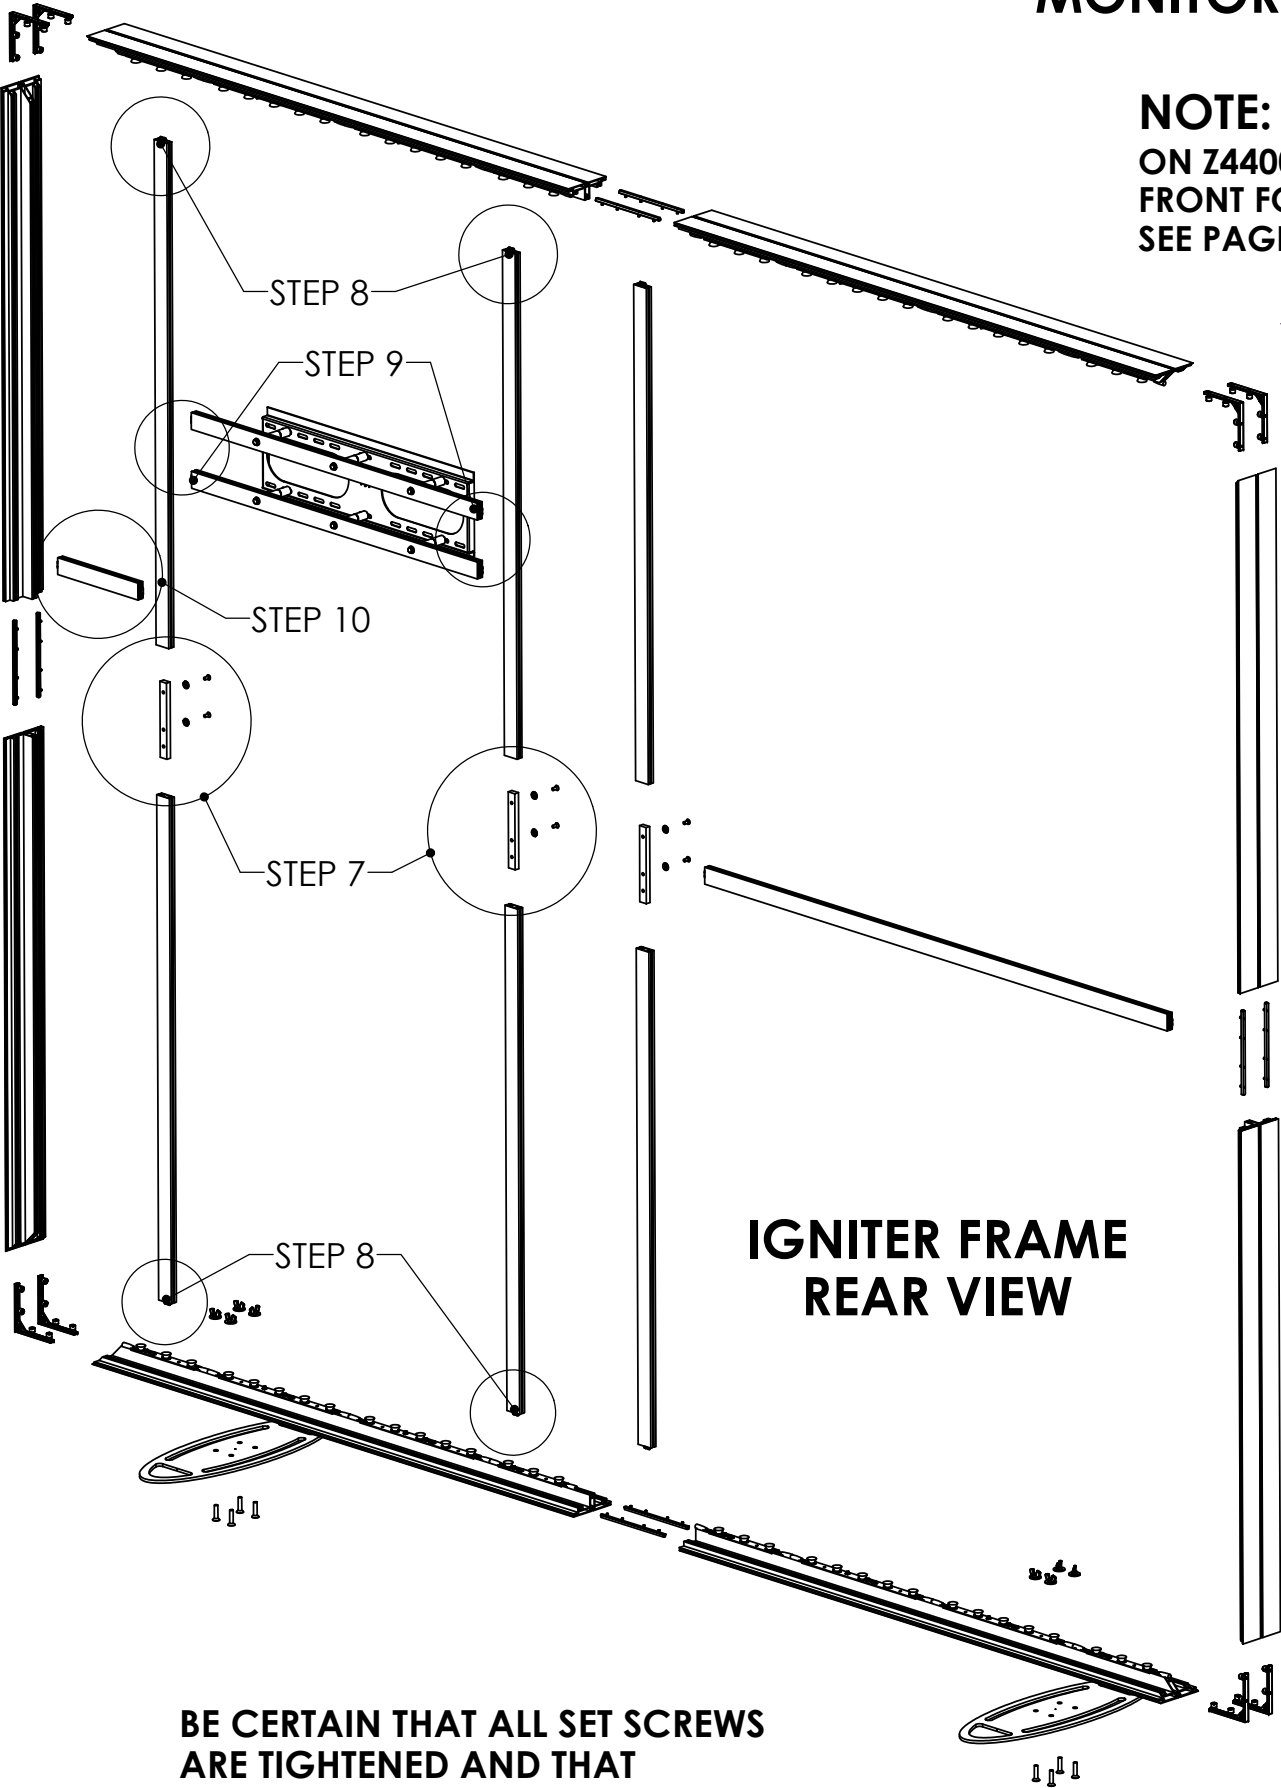

IGNITER FRAME
REAR VIEW

BE CERTAIN THAT ALL SET SCREWS
ARE TIGHTENED AND THAT
INTERLOCKS ARE FULLY ENGAGED
AND SECURE AS IN DETAIL A.


FRONT

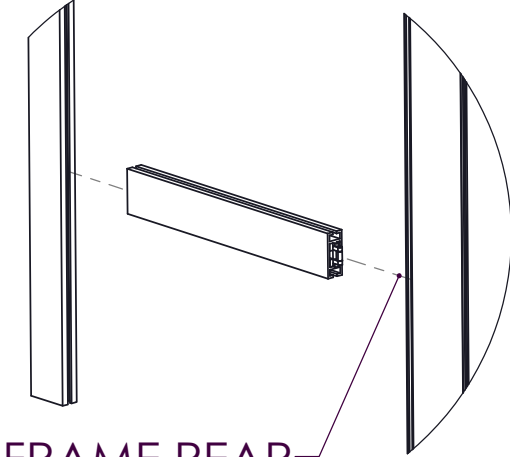

FRAME REAR
CHANNEL

10. ASSEMBLE HORIZONTAL MONITOR
SUPPORT TO THE FRAME BY INSERTING
INTERLOCKS INTO REAR CHANNEL OF
THE FRAME AND SIDE CHANNEL OF THE
LONG VERTICAL MONITOR SUPPORT. BE
SURE TO TIGHTEN ALL INTERLOCKS.

DETAIL A

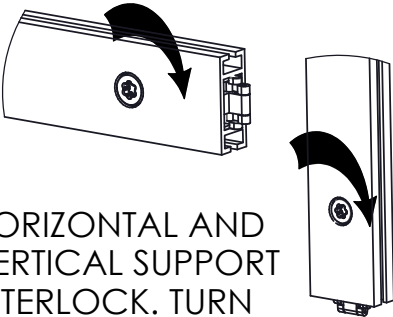


HORIZONTAL AND
VERTICAL SUPPORT
INTERLOCK. TURN
TO TIGHTEN, REVERSE
TO LOOSEN.

| | | |
|---------------------------------------|------------------------|---|
| FINISH: | THIRD ANGLE PROJECTION | THIS DOCUMENT AND DATA DISCLOSED HEREIN OR HEREWITH IS NOT TO BE REPRODUCED, USED, OR DISCLOSED IN WHOLE OR IN PART TO ANYONE WITHOUT PERMISSION OF NIEDO GROUP, INC. |
| MATERIAL: | | |
| DIMENSIONS ARE IN MILLIMETERS | NIEDO GROUP, INC. | 5465 SW WESTERN AVE. BEAVERTON, OR 97005 |
| TOLERANCES UNLESS OTHERWISE SPECIFIED | | |
| SCALE: NA | DO NOT SCALE DRAWING | SHEET 1 |
| | | REV -01 |

118" x 96" FREESTANDING IGNITER LIGHTBOX
IG118X96-TVR

LED ARRAY INTERCONNECT DETAIL

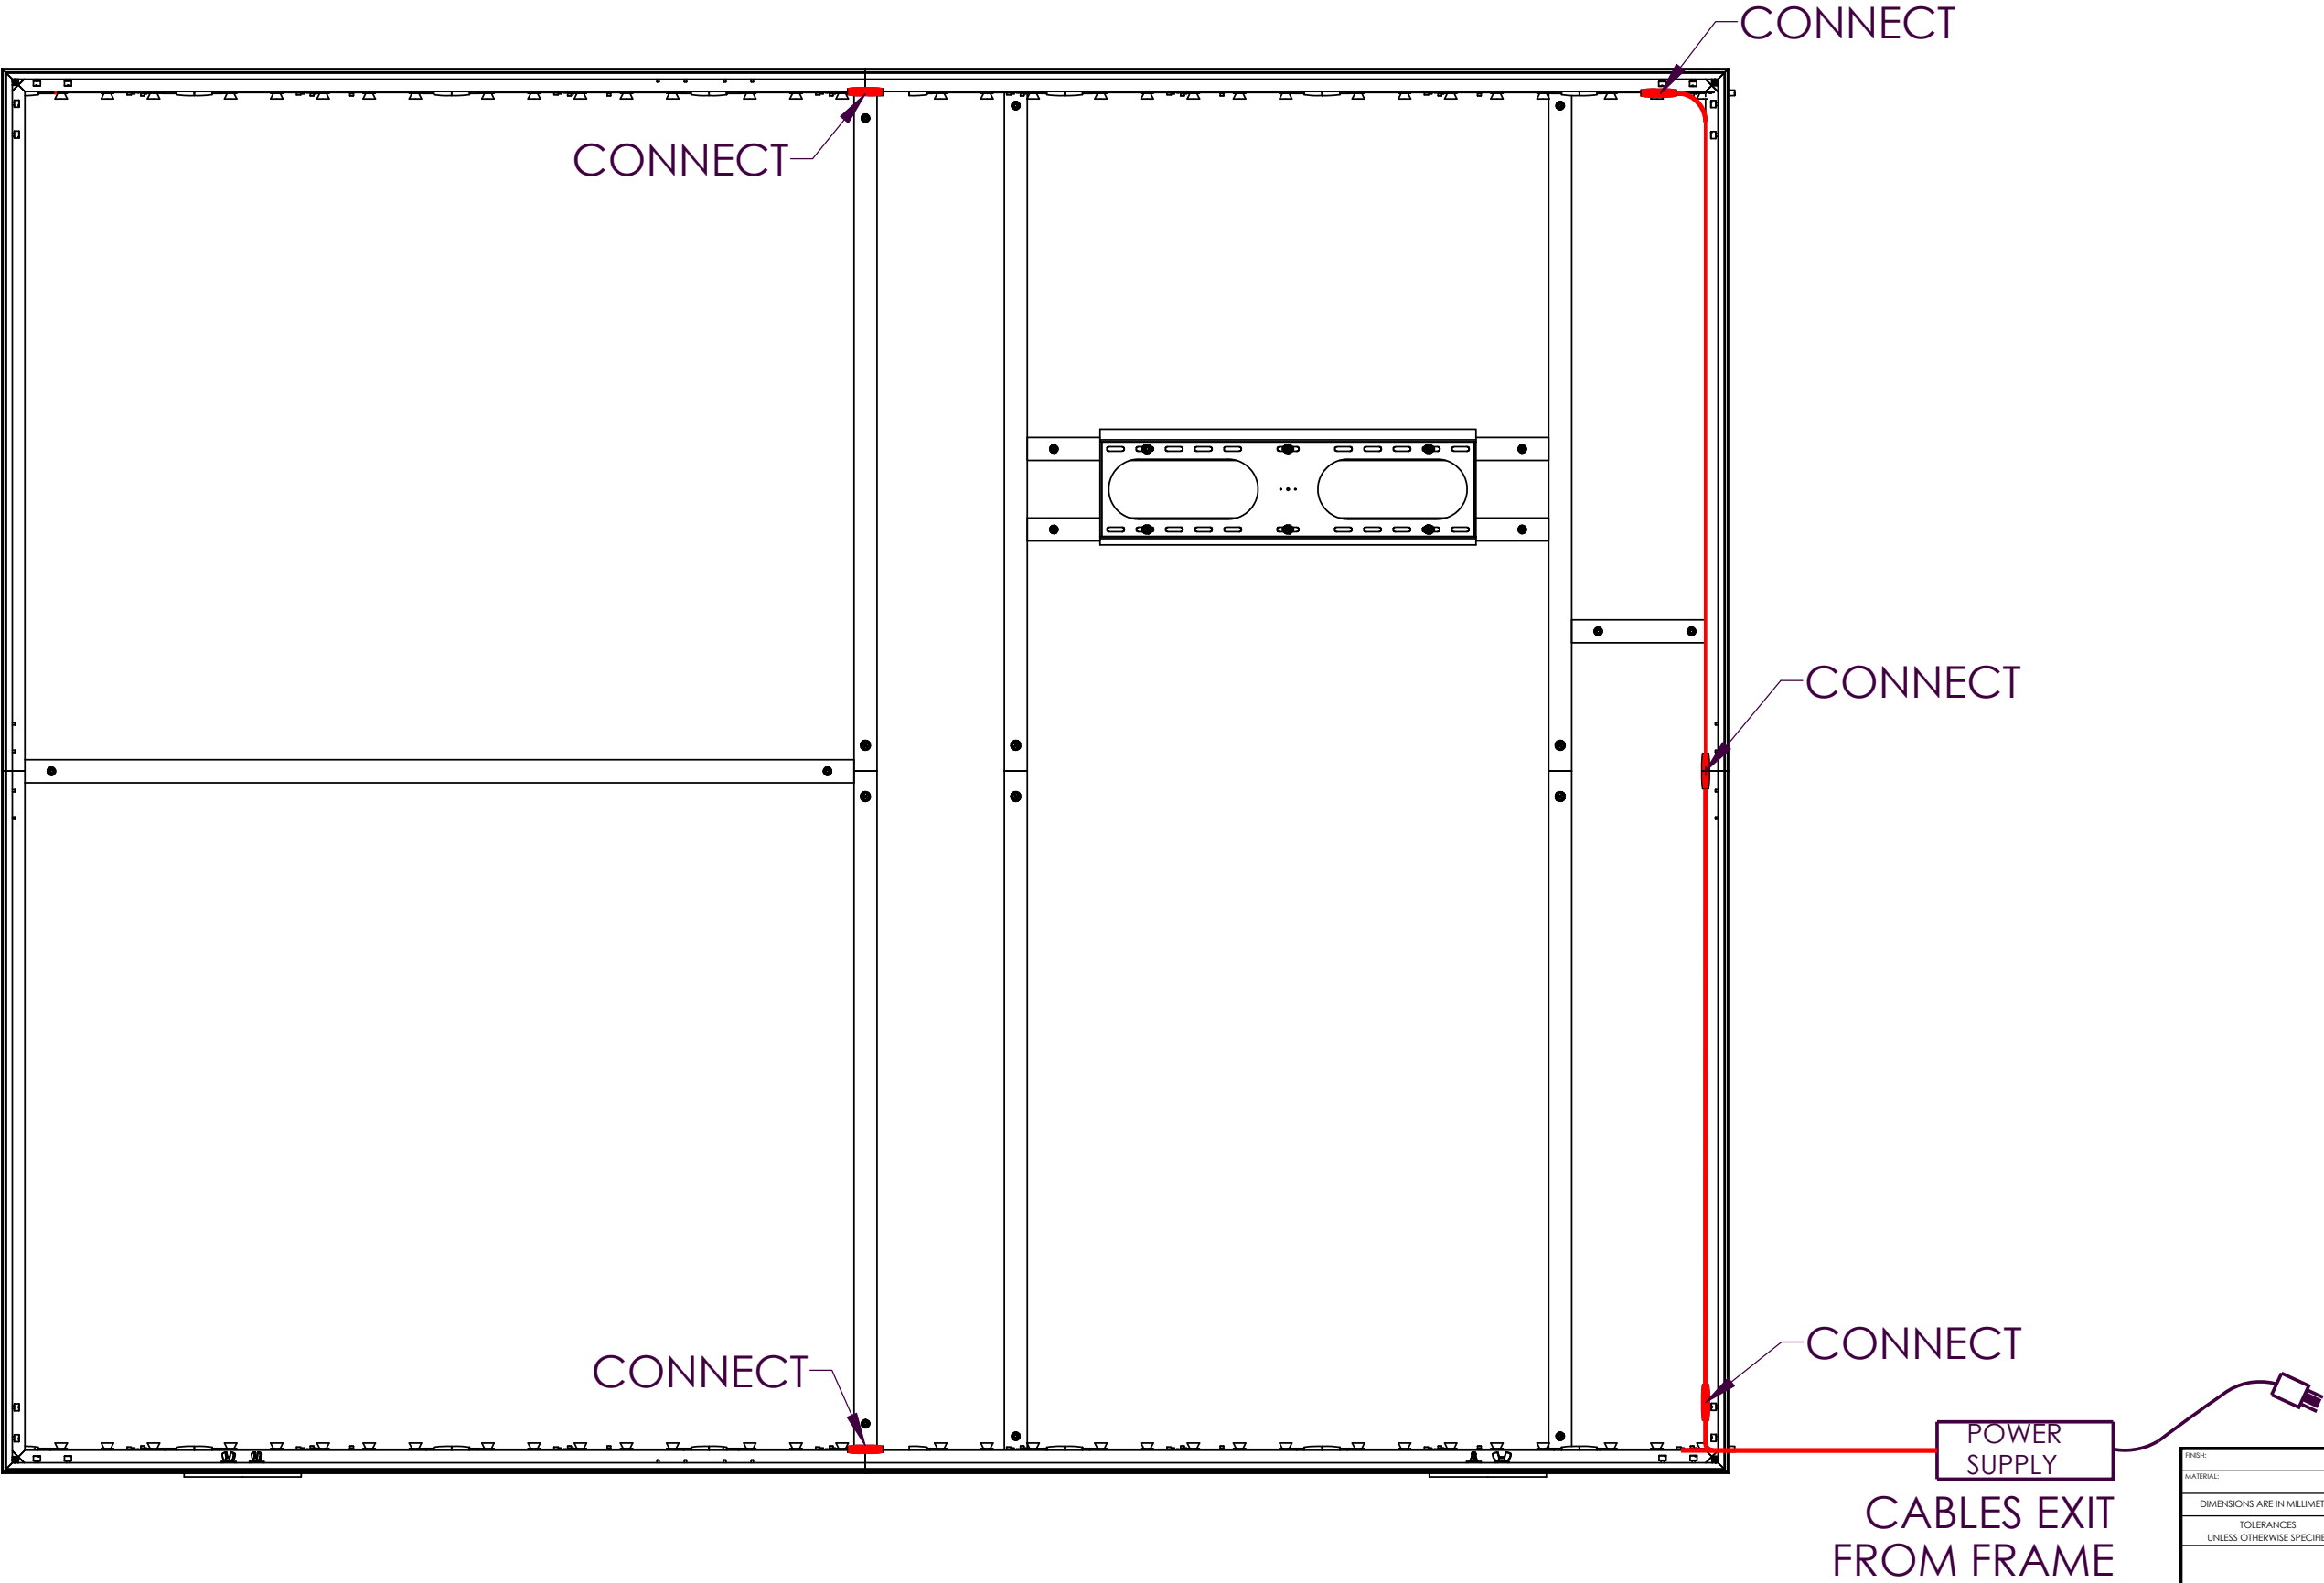

| | | | | | |
|--|--|--|--|--|--|
| FINISH: | | THIRD ANGLE PROJECTION | | <div><div></div><div></div></div> <div>THIS DOCUMENT AND DATA DISCLOSED HEREIN OR HEREWITH IS NOT TO BE REPRODUCED, USED, OR DISCLOSED IN WHOLE OR IN PART TO ANYONE WITHOUT PERMISSION OF NIEDO GROUP, INC.</div> | |
| MATERIAL: | | <div><div></div></div> | | NIEDO GROUP, INC. 5465 SW WESTERN AVE BEAVERTON, OR 97005 | |
| DIMENSIONS ARE IN MILLIMETERS | | | | | |
| TOLERANCES UNLESS OTHERWISE SPECIFIED | | 118" x 96" FREESTANDING IGNITER LIGHTBOX WITH RH MONITOR SETUP INSTRUCTION | | | |
| SIZE B | | DWG. NO. | | REV -01 | |
| SCALE: NA | | DO NOT SCALE DRAWING | | SHEET 1 | |

Silicone Edge Graphics (SEG)

Installation Instructions into hardware

What are Silicone Edge Graphics (SEG)?

SEG are dye-sublimation fabric graphics with silicone strips sewn along the underside of the fabrics edge. SEG frames have grooves along their perimeter designed to snugly hold the silicone strips so the fabric can be stretched across the frame for a drum-tight fit.



We recommend laying the frame on the floor, then draping the fabric graphic on top.

The following procedure ensures the silicone edge will be place evenly over the entire frame and NOT STRETCH or GROW at the corners. Once all the edges have been secured, you should have a taut fit with a smooth flat finish.

1: With Clean Hands,


Press SEG silicone edge first, into the corners of the frame.



2: Working in Centers.

Go back and press the silicone edge into the center - on eachside of the frame.

EXAMPLE: A 20"x20" fabric/frame would be pressed in 8 locations.

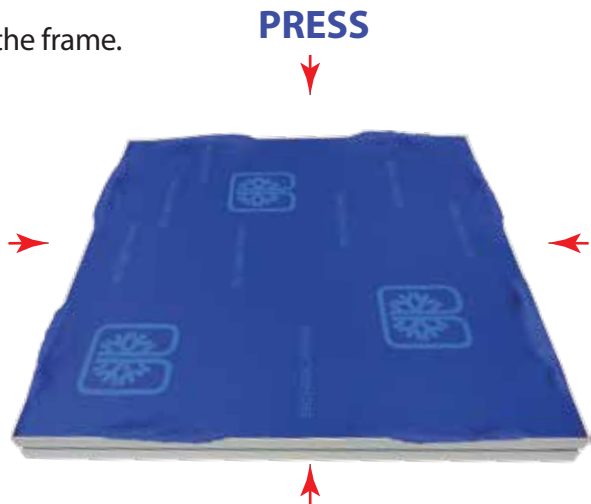



Cont'd.

3: Working in Centers again,

Go back and press the silicone edge once again on each side previous center, on all 4 sides.

Repeat this process, (WORKING IN CENTERS) until the SEG fabric's edge is pressed aproximately every 6 inches apart.

EXAMPLE: A 8' x 8' frame (using this procedure) will have been pressed/tucked 15 times (not including corners) on each side of the frame.

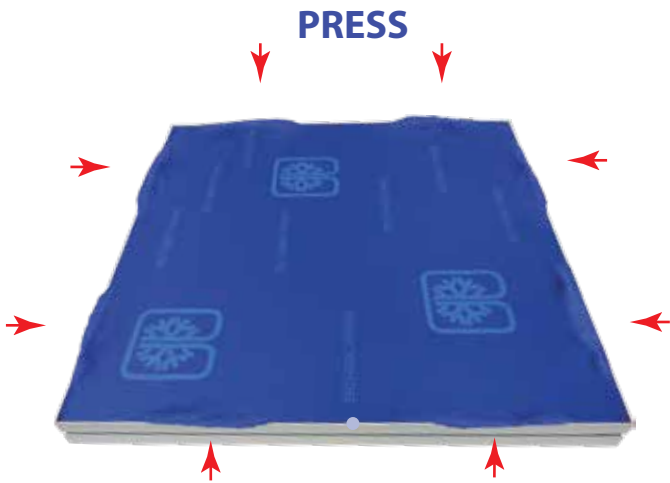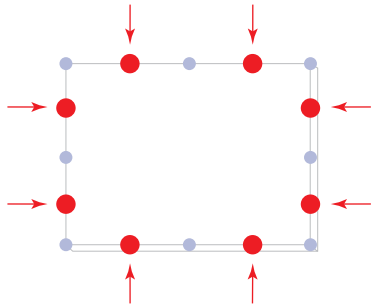

4: After all has been pressed into your frame using

this procedure, lightly tap your forefinger to smooth fabric between the tucks.



CARE INSTRUCTIONS

Due to the fine quality, smoothness and weave of the fabric, great care must be taken to extend the life of your SEG fabric graphics.

We recommend very loosely folding your graphic, making sure there are no hard creases or folds or that the fabric doesn't catch on sharp obects.

Store in a clean bag.
A plastic bag or pillow case is ideal.
Graphics can also be spot cleaned with a damp cloth.

To wash entire graphic, use a commercial size front loading washing machine on gentle cycle with cool water. Do NOT dry clean.

You can also gently iron the back side using the Polyester setting of your iron.

